

TELLER COUNTY BUILDING DEPT.


Ice Shield & Valley Flashing Requirements

On eaves, 24" from inside of wall level back, then plumb up. Ice shield must go to edge of eave. Exception: for open rafters with no soffits on unheated area, need only have ice shield 6" below wall. The lower section may be minimum 15lb felt. (See drawing below)

Valley flashing is required. A minimum thickness of 28 gauge. Running 8" min up each way from centerline of valley. A 36" wide Ice Shield is required up Valley, 18" minimum each way from centerline.

These requirements are for 3/12 pitch and greater (asphalt, composite & metal roofs only)

Highly recommend Ice shield & felt paper be run up any vertical surfaces min of 12", along with required flashing

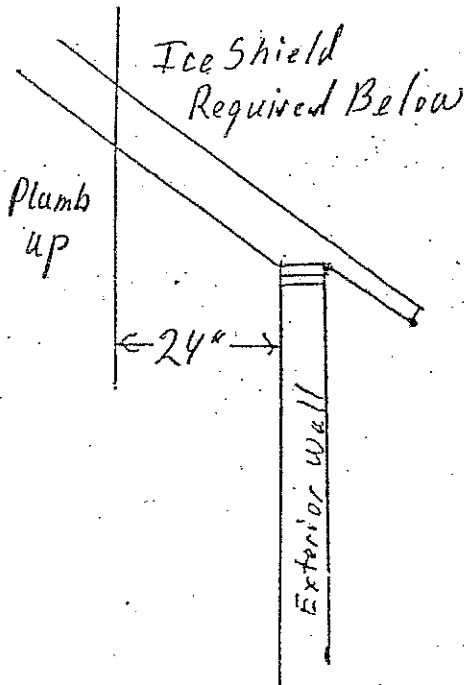

For additional information, please see the “Teller County Building Code” – available on our web page www.co.teller.co.us or 540 Manor Court, Woodland Park, CO (719-687-3048)